


## Compact and powerful red light emitter for marking cutting lines and many other optical projections - Series LT1S20

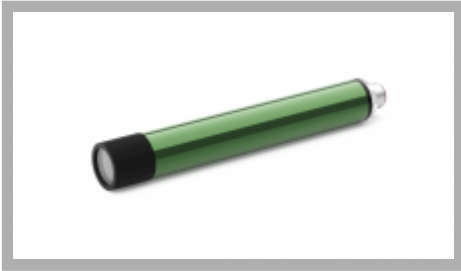

### M4330A4VL0

**Type of projection:** Line  
**Wavelength:** 635 nm (bright red)  
**Max output power:** 30 mW  
**Supply voltage:** 5 Vdc  
**Protection class:** IP67

## TECHNICAL DETAILS

|                                    |  |
|------------------------------------|--|
| <b>Code</b>                        | M4330A4VL0   |
| <b>Light source</b>                | Laser diode  |
| <b>Type of projection</b>          | Line   |
| <b>Wavelength</b>                  | 635 nm (bright red)  |
| <b>Max output power</b>            | 30 mW  |
| <b>Supply voltage</b>              | 5 Vdc  |
| <b>Operating current</b>           | <120 mA  |
| <b>Connection</b>                  | M12 connector + cm 500 cable   |
| <b>Casing</b>                      | Green anod.alum.   |
| <b>Dimension</b>                   | 20x145 mm  |
| <b>Linelength</b>                  | Max 9mt  |
| <b>Protection class</b>            | IP67   |
| <b>Laser class</b>                 | 2M   |
| <b>Storage temperature °C/°F</b>   | -40 +85 °C / -40 +185 °F   |
| <b>Operating temperature °C/°F</b> | -10 +50 °C / 14 +122 °F  |
| <b>Application sector</b>          | Nautical constructions, construction, rubber, plastic, metals, textiles, ceramics, wood, marble and stone, glass, paper, leather/skins, tyres, medicine, measurements etc.   |
| <b>Color</b>                       | Bright red   |
| <b>Note</b>                        | For better use you have to specify the focus distance. If not specified, emitter is focused for infinity. Line lenses with spread 5°, 20°, 30°, 45°, 90° available. The line has a wide, at a distance of mm 1000 from the emission point and perpendicularly to laser beam, as it follows: 05° spread = mm 70 ; 20° spread = mm 310 ; 30° spread = mm 660 ; 45° spread = 800mm; 90° spread = mm 1800. You have to specify the spread that you wish. If not specified, emitter is shipped with a 90° spread lens. The visibility and the lenght of the line depend on the mounting of the laser and the brightness of the enviroment. Other optical projections available on request |

## RELATED ACCESSORIES

- Stabilized power supplier, input 80-30Vac-Vdc, output 5Vdc, 1A DIN attachment
- Stabilized power supplier input 85-265Vac, output 5Vdc, 600mA, schuco plug
- Stabilized power supplier input 100-240Vdc, output 5Vdc, 3A, DIN attachment
- Dimming flap 20 mm diam, black
- Reclining bracket for 20 mm diam module, black
- Inox rod diam mm 20x295, side milled, fixing holes (to be used with brackets 9SM2001N00 - 9SM5001N00)
- Horiz/vert twistable bracket for 20 mm diam module, black anod. alum., mountable on 20 mm diam rod
- Adjustable bracket for 20 mm diam module, flat, black, 12 mm diam inox rod included

# LASERTECH®

— industrial laser pointers —

- Protection for 20 mm diam module - white

# LASERTECH®

— industrial laser pointers —